



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, DC 20460

OFFICE OF CHEMICAL SAFETY
AND POLLUTION PREVENTION

November 21, 2017

Mr. Kevin Kutcel
Regulatory Agent for,
New Nautical Coatings Inc.
14805 49th Street
Clearwater, FL 33762

Subject: Notification per PRN 98-10 – Revisions to the Product Labeling
Product Name: Sea Hawk Yacht Finishes Premium Quality AF33 Antifouling Paint
EPA Registration Number: 44891-12
Application Date: November 10, 2017
Decision Number: 535835

Dear Mr. Kutcel:

The Agency is in receipt of your Application for Pesticide Notification under Pesticide Registration Notice (PRN) 98-10 for the above referenced product. The Antimicrobials Division (AD) has conducted a review of this request for its applicability under PRN 98-10 and finds that the action requested falls within the scope of PRN 98-10.

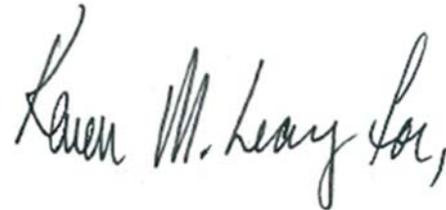
The label submitted with the application has been stamped “Notification” and will be placed in our records.

Should you wish to add/retain a reference to the company’s website on your label, then please be aware that the website becomes labeling under the Federal Insecticide Fungicide and Rodenticide Act and is subject to review by the Agency. If the website is false or misleading, the product would be misbranded and unlawful to sell or distribute under FIFRA section 12(a)(1)(E). 40 CFR 156.10(a)(5) list examples of statements EPA may consider false or misleading. In addition, regardless of whether a website is referenced on your product’s label, claims made on the website may not substantially differ from those claims approved through the registration process. Therefore, should the Agency find or if it is brought to our attention that a website contains false or misleading statements or claims substantially differing from the EPA approved registration, the website will be referred to the EPA’s Office of Enforcement and Compliance.

Page 2 of 2
EPA Reg. No. 44891-12
Decision No. 535835

If you have any questions, you may contact Karen M. Leavy at (703)-308-6237 or via email at Leavy.Karen@epa.gov.

Sincerely,

A handwritten signature in black ink that reads "Karen M. Leavy, Esq.". The signature is written in a cursive style with a large initial 'K' and a trailing comma.

Eric Miederhoff
Product Manager 31
Regulatory Management Branch I
Antimicrobials Division (7510P)
Office of Pesticide Programs

Notes to reviewer are bracketed []

HIGHLIGHTED

Statements in parenthesis are optional or alternative text ()

~~Strike through~~ Delete

[Brand Names]

Sea Hawk Yacht Finishes Premium Quality AF33 Antifouling Paint

[Alternative Brand Names]

[Add] {TALON}

Sea Hawk Single Season Protection Talon

Sea Hawk Cukote Pro Antifouling Coating

Sea Hawk AF33

SeaHawk AF33

NOTIFICATION

44891-12

The applicant has certified that no changes, other than those reported to the Agency have been made to the labeling. The Agency acknowledges this notification by letter dated:

11/21/2017

ACTIVE INGREDIENT:	
Cuprous Oxide...(CAS No. 1317-39-1).....	33.6%
OTHER INGREDIENTS:	66.4%
TOTAL	100.00%
Copper expressed as metallic 29.84%	
Contains Petroleum Distillates	

AF 33

Antifouling Paint

KEEP OUT OF REACH OF CHILDREN

DANGER POISON

SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

(LIMITED WARRANTY: The manufacturer warrants all material sold by it against defects in the material. The manufacturer's liability under the sale and warranty of this material shall in any case be limited to replacement of material only. The manufacturer makes no other warranty of this product, expressed or implied.)

[OPTIONAL MARKETING STATEMENTS:]

- {Sea Hawk}
- {Yacht Finishes}
- {Premium Quality}
- {Antifouling Coating}
- {Self Polishing}
- {Antifouling Paint}
- {Ablative}

{Antifouling Bottom Paint}
{Hand Crafted in America!SM}
{Hand Crafted in the USA}
{American Owned and Hand Crafted}
{USA Hand Crafted}
{Multi Season}
{Single Season Protection}
{330 VOC}
{Reduced VOC}
{VOC 330}
{Grams Liter}
{American Owned and Hand Crafted}
{398 VOC}
{VOC 398}
{California Compliant}
{CA VOC Code Compliant}
{Standard Formulation}
(330 grams/liter VOC)
(Contains 330 grams/liter VOC)
(VOC 330 grams/liter)
(330 g/l VOC)
(Contains 330 g/l VOC)
(VOC 330 g/l)
(Single Season Semi-Hard Hybrid Ablative Antifouling)
(Harder, self-polishing ablativ finish)
(Semi-Hard Hybrid Ablative Antifouling)

[Optional Graphics]



PREMIUM QUALITY





AF 33



[ABOVE BAR CODE WILL APPEAR ON EACH CAN AND THE NUMBERS PROVIDED THE ABOVE WILL CORRESPOND WITH THE BAR CODE ISSUED FOR THAT PRODUCT.]



[Above will be used with contents and manufacturer depending on the size]
[Net Contents:] {5-gallon pail 18.927}, {Gallon 3.785 Liters}, {Quart 0.9463 Liters}

{Batch Code} [to appear on front or back panel of the label or immediate container depending on the container type/size]

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

GENERAL DESCRIPTION

AF33 is an abrasive, self-polishing antifouling that controls the attachment of barnacles, algae, seagrass, green weed and other fouling organisms in fresh and salt water. This product is designed for use on the surface of hulls on ships, boats, barges, crab pots, fish nets, traps, lines, docks, walls, or any other surface prone to fouling. Shake vigorously for several minutes with a mechanical paint shaker before use. Due to settlement of copper in the product if this product is not properly shaken it may become ineffective.

APPLICATION DETAILS

Do not apply this product in a way that will contact adults, children, pets, either directly or through drift. Do not allow adults, children, or pets to enter the treated area until sprays have dried. Apply product generously on the surface to be coated. More coats will ensure a longer life. Do not apply product during moist conditions such as rain or high humidity. Due to the nature of this product it is not intended for fast moving vessels. Wait at least 12 hours before submerging in water.

Sweat in Time: Not applicable

Thinner: 2033-2035[ADD] {Sea Hawk 2033-2035 for regular formulation} {Sea Hawk 2053 for VOC 330 formulation}

Cleaner: Sea Hawk Xylene 7130

REGULATORY DATA

VOC: 398 Grams/Liter [ADD] {330 Grams/Liter}

LIMITATIONS: Apply in good weather when air and surface temperature are above 50°F (10°C). Surface temperature must be at least 50°F (10°C) {5°F (1°C)} above dew point. For optimum application properties, bring material to 70-80°F (21- 27°C) temperature range prior to mixing and application. Unmixed material (in closed containers) should be maintained in protected storage between 40° and 100°F (4-38°C). Prolonged atmospheric exposure of this product may detract from performance. Technical and application data herein is for the purpose of establishing a general guideline for the coating and the proper coating application procedures. As application, environmental and design factors can vary significantly, due care should be exercised in the selection, verification of performance and use of the coating.

SURFACE PREPARATION: Paint only clean, dry surfaces. Remove all grease, oil, wax, or other foreign material by solvent or detergent washing. (SSPC-SPI)

APPLICATION: This product can be applied by brush, roller or spray. {Apply at least two coats by brush, roller or spray.}

THINNING: We do not recommend thinning of this product.

CLEANUP: Clean all equipment immediately after use with Sea Hawk Xylene 7130.

SAFETY: Read and observe all precautionary statements on this label.

STORAGE AND DISPOSAL

Do not contaminate food, feed or water by storage or disposal.

STORAGE: Do not store near heat or flame. Store in well-ventilated area.

PESTICIDE DISPOSAL: Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal law. If these wastes cannot be disposed of by the use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

[CONTAINER DISPOSAL]: Non-refillable container, do not reuse or refill this container. Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities. (Prior to container disposal, allow any remaining paint residue in the container to air dry. Dispose of the container in accordance with Federal, State or local disposal regulations.)

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER. Fatal if swallowed or absorbed through skin or inhaled. Corrosive. Causes irreversible eye damage. Causes skin burns. Do not get in eyes, on skin or on clothing. Do not breathe vapors, spray mist, or dust. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals.

PERSONAL PROTECTIVE EQUIPMENT (PPE)

Mixers loaders, applicators and other handlers must wear protective clothing (long-sleeved cotton shirt, long pants, shoes plus socks, and hat) and chemical resistant gloves. Some materials that are chemical-resistant to this product are nitrile and butyl. While spraying paint or sanding surface, wear protective eyewear such as goggles, face shield or safety glasses. Wear a NIOSH-approved respirator with an organic vapor (OV)

cartridge with a combination N, R, or P filter with NIOSH approval number prefix 84A; or NIOSH approved gas mask with an organic vapor canister with NIOSH approval number prefix TC-14G; or a NIOSH approved powered air purifying respirator with organic vapor (OV) cartridge and combination HE filter with NIOSH approval number prefix TC 23C. **User safety requirements:** Follow manufacturer's instructions for cleaning / maintaining PPE. If no such instructions for washables exist, use detergent and hot water. Keep and wash PPE separately from other laundry. Wash the outside of gloves before removing. Discard clothing and other absorbent materials that have been drenched or heavily contaminated with this product's concentrate. Do not reuse them.

USER SAFETY RECOMMENDATIONS

Remove clothing / PPE immediately if pesticide gets inside. Then wash thoroughly and put on clean clothing. Remove PPE immediately after handling this product. As soon as possible, wash thoroughly and change into clean clothing. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, using tobacco or using the toilet. Remove and wash contaminated clothing before reuse.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish and aquatic invertebrates and may contaminate water through runoff. This product has a potential for runoff for several months or more after application. Poorly draining soils and soils with shallow water tables are more prone to produce runoff that contains this product. Drift and runoff may be hazardous to aquatic organisms in water adjacent to treated areas. Do not apply directly to water, to areas where surface water is present, or to intertidal areas below the mean high water mark. Do not contaminate water when disposing of equipment wash water or rinsate.

PHYSICAL AND CHEMICAL HAZARDS

Combustible. Do not use or store near open flame.

FIRST AID	
IF SWALLOWED:	• Immediately call a poison control center or doctor. • Do not induce vomiting unless told to do so by a poison control center or doctor. Do not give any liquid to the person. • Do not give anything by mouth to an unconscious person.
IF ON SKIN OR CLOTHING:	• Take off contaminated clothing. • Rinse skin immediately with plenty of water for 15 – 20 minutes. • Call a poison control center or doctor for treatment advice.
IF IN EYES:	• Hold eye open and rinse slowly and gently with water for 15-20 minutes. • Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. • Call a poison control center or doctor for treatment advice.
IF INHALED:	• Move person to fresh air. • If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably by mouth-to-mouth, if possible. • Call a poison control center or doctor for further treatment advice.
Have the product container or label with you when calling a poison control center or doctor or going for treatment. You may also contact 1-800-222-1222 for emergency medical treatment information.	
For Hazardous Materials [or Dangerous Goods] Incident Spill, Leak, Fire, Exposure, or Accident Call CHEMTREC Day or Night. Within USA and Canada 1-800-424-9300. Outside USA and Canada +1-703-527-3887 (+1-703-741-5970) CHEMTREC. Account #15570.	
For Non Emergencies call New Nautical Coatings Inc., Within the USA and Canada 1-800-528-0997, Outside USA and Canada +1-727-523-8053.	

NOTE TO PHYSICIAN: Probable mucosal damage may contraindicate the use of gastric lavage. Contains petroleum distillate, vomiting may cause aspiration pneumonia.

E.P.A. Registration No. 44891-12 / E.P.A. Establishment No. 44891-FL-1